





DISTRIBUITOR COLECTOR MODULAR

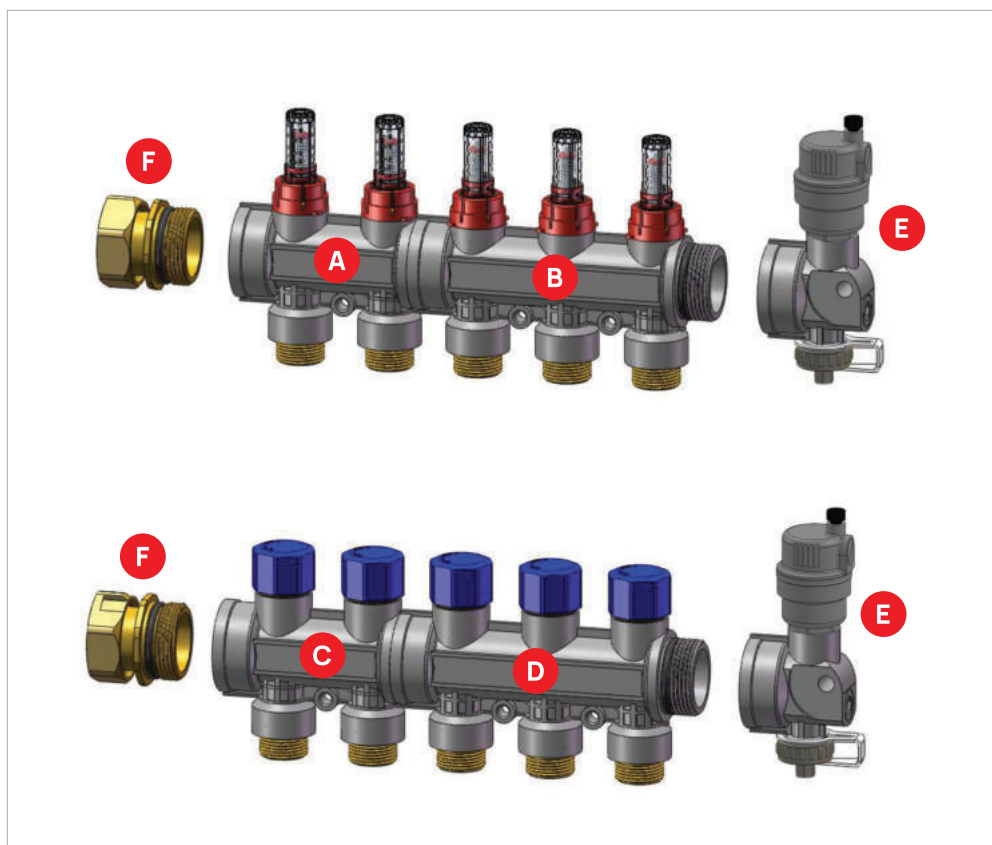


- A.** Modul dublu tur
- B.** Modul triplu tur
- C.** Modul dublu retur
- D.** Modul triplu retur
- E.** Modul accesorii
- F.** Modul racordare 1" 1/4

DIMENSIUNI

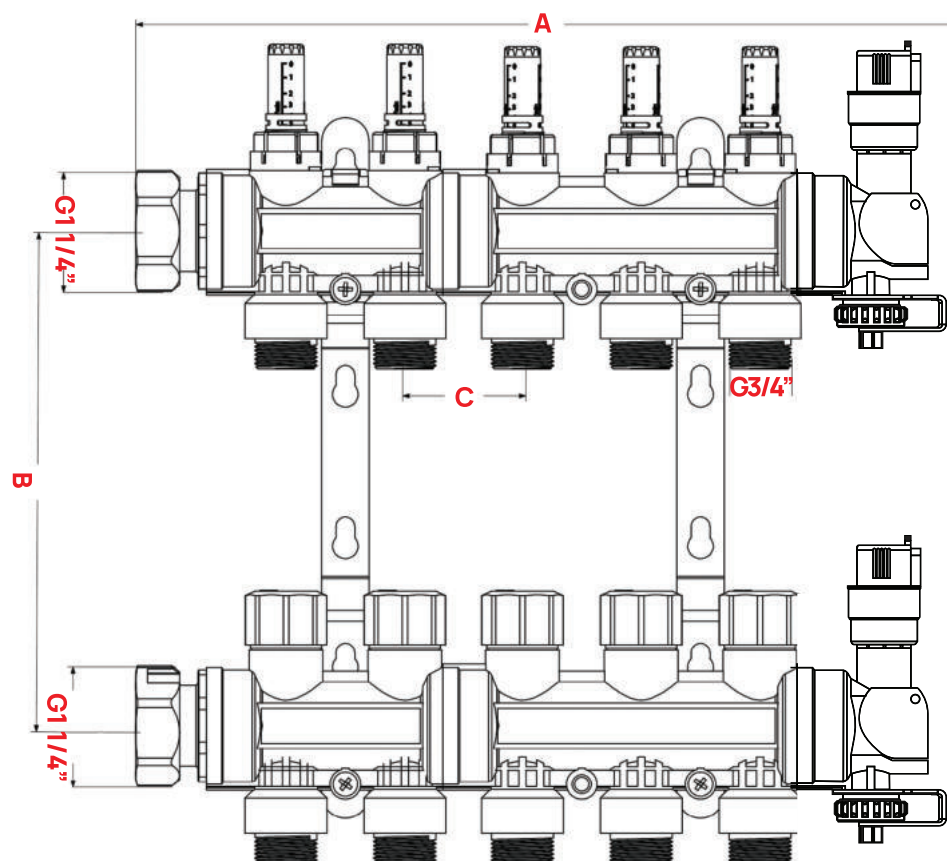

Număr circuite	Cod produs	Distanța A	Distanța B	Distanța C
2	316.02.54	195	210	50
3	316.03.54	245	210	50
4	316.04.54	295	210	50
5	316.05.54	345	210	50
6	316.06.54	395	210	50
7	316.07.54	445	210	50
8	316.08.54	495	210	50
9	316.09.54	545	210	50
10	316.10.54	595	210	50
11	316.11.54	645	210	50
12	316.12.54	695	210	50
13	316.13.54	745	210	50
14	316.14.54	795	210	50
15	316.15.54	845	210	50
16	316.16.54	895	210	50

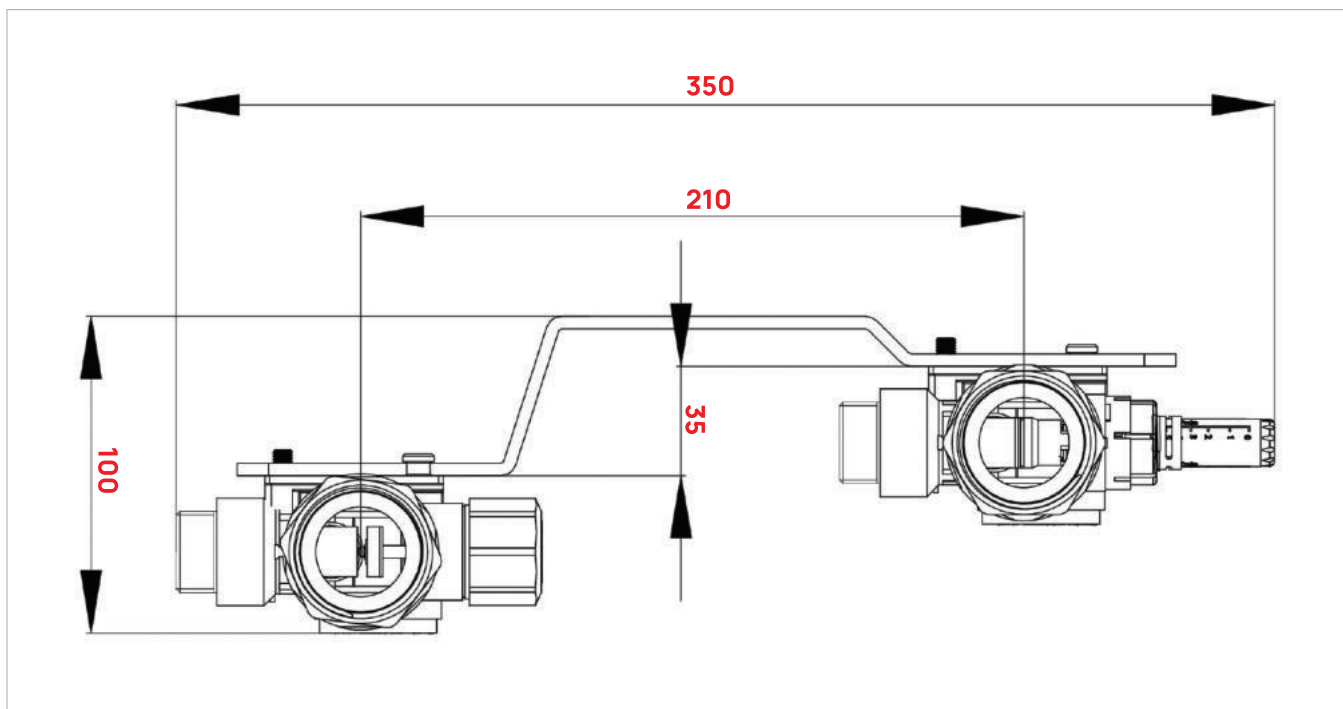

DATE TEHNICE

PARAMETRI	VALOARE
Conexiune principală	G1 1/4" cu racord olandez
Conexiune circuit de încălzire/răcire	G3/4 eurocon
Temperatura și presiunea de operare	Max. 60°C la 6 bar; Max. 90°C la 3 bar
Debit	Max. 3.5 m ³ /h
Coeficient de debit Kvs robinet de golire	0.75 m ³ /h
Dimensiuni disponibile	2 - 16 circuite de încălzire/răcire
Forța de strângere racorduri eurocon	20 - 25 Nm, max. 30 Nm